



Power Inductor ENR30 F Series Product Specifications

Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	1/9

■ Power Inductor — ENR30 F Series



■ Parts Number Explanation

Example:

ENR	3010	F	R47	M	T	W	Z
Product Type	Size (mm)	Application	Inductance (uH)	Tolerance	Package	Internal Code	Optional
Wire-wound Power Inductor	3010 3012 3015		R47 : 0.47uH R68 : 0.68uH 220 : 22.0uH	N : ±30% M : ±20% K : ±10%	T : Taping		Z : Default Code



**Power Inductor ENR30 F Series
Product Specifications**

Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	2/9

Standard Electrical Specifications

Part No.	Inductance	DCR (mΩ)	DCR (mΩ)	Isat (A)	Irms (A)
	L (μH)	MAX	TYP	$\Delta L/L_0 \leq 30\%$	$\Delta T \leq 40^\circ C$
ENR3010F-1R0M-TWZ	1.0	80	60	2.30	2.10
ENR3010F-1R5M-TWZ	1.5	100	75	2.10	2.00
ENR3010F-2R2M-TWZ	2.2	140	115	1.60	1.50
ENR3010F-3R3M-TWZ	3.3	189	160	1.30	1.20
ENR3010F-4R7M-TWZ	4.7	280	215	1.10	1.00
ENR3010F-6R8M-TWZ	6.8	380	300	0.95	0.90
ENR3010F-100M-TWZ	10	520	465	0.75	0.70
ENR3010F-150M-TWZ	15	850	750	0.60	0.50
ENR3010F-220M-TWZ	22	1300	1000	0.50	0.45
ENR3010F-330M-TWZ	33	2050	1600	0.40	0.35
ENR3010F-470M-TWZ	47	2500	2000	0.35	0.30
ENR3012F-R22N-TWZ	0.22	30	22	5.30	3.50
ENR3012F-R82N-TWZ	0.82	46	36	2.30	2.20
ENR3012F-1R0M-TWZ	1.0	60	50	2.00	1.95
ENR3012F-1R2M-TWZ	1.2	72	58	1.80	1.75
ENR3012F-1R5M-TWZ	1.5	72	58	1.60	1.55
ENR3012F-1R8M-TWZ	1.8	95	75	1.50	1.45
ENR3012F-2R2M-TWZ	2.2	105	85	1.40	1.35
ENR3012F-2R4M-TWZ	2.4	110	88	1.30	1.25
ENR3012F-2R7M-TWZ	2.7	110	88	1.14	1.10
ENR3012F-3R3M-TWZ	3.3	130	98	1.05	1.00
ENR3012F-3R6M-TWZ	3.6	156	138	1.05	1.00
ENR3012F-3R9M-TWZ	3.9	156	138	1.00	0.95
ENR3012F-4R7M-TWZ	4.7	156	138	0.90	0.85
ENR3012F-5R6M-TWZ	5.6	226	175	0.80	0.75
ENR3012F-6R8M-TWZ	6.8	247	190	0.75	0.70
ENR3012F-100M-TWZ	10	345	290	0.60	0.55
ENR3012F-120M-TWZ	12	480	400	0.50	0.45
ENR3012F-150M-TWZ	15	492	410	0.45	0.43
ENR3012F-180M-TWZ	18	709	570	0.43	0.42
ENR3012F-220M-TWZ	22	839	700	0.42	0.40



Power Inductor ENR30 F Series Product Specifications


Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	3/9

Part No.	Inductance	DCR (mΩ)	DCR (mΩ)	Isat (A)	Irms (A)
	L (μH)	MAX	TYP	$\Delta L/L \leq 30\%$	$\Delta T \leq 40^\circ\text{C}$
ENR3012F-270M-TWZ	27	1100	760	0.35	0.34
ENR3012F-330M-TWZ	33	1130	880	0.34	0.32
ENR3012F-360M-TWZ	36	1200	930	0.33	0.30
ENR3012F-390M-TWZ	39	1700	1200	0.30	0.28
ENR3012F-470M-TWZ	47	1800	1350	0.27	0.26
ENR3012F-560M-TWZ	56	1900	1500	0.26	0.25
ENR3012F-680M-TWZ	68	2150	1700	0.24	0.22
ENR3012F-820M-TWZ	82	3200	2500	0.21	0.20
ENR3012F-101M-TWZ	100	3600	2900	0.20	0.18
ENR3015F-1R0M-TWZ	1.0	39	32	2.40	2.30
ENR3015F-1R2M-TWZ	1.2	50	41	2.35	2.20
ENR3015F-1R5M-TWZ	1.5	65	52	2.30	2.10
ENR3015F-2R2M-TWZ	2.2	78	66	1.90	1.80
ENR3015F-3R3M-TWZ	3.3	104	94	1.40	1.30
ENR3015F-4R7M-TWZ	4.7	160	126	1.10	1.00
ENR3015F-6R8M-TWZ	6.8	240	180	0.85	0.80
ENR3015F-100M-TWZ	10	325	270	0.78	0.75
ENR3015F-120M-TWZ	12	380	290	0.75	0.70
ENR3015F-150M-TWZ	15	450	350	0.70	0.65
ENR3015F-220M-TWZ	22	595	500	0.52	0.50
ENR3015F-330M-TWZ	33	1150	860	0.48	0.45
ENR3015F-470M-TWZ	47	1500	1150	0.35	0.34
ENR3015F-680M-TWZ	68	2500	2000	0.33	0.30
ENR3015F-101M-TWZ	100	3200	2500	0.27	0.25

Notes :

1. Test Frequency : 100KHZ/0.25V
2. Tolerance : N: $\pm 30\%$; M: $\pm 20\%$; K: $\pm 10\%$

■ Dimensions

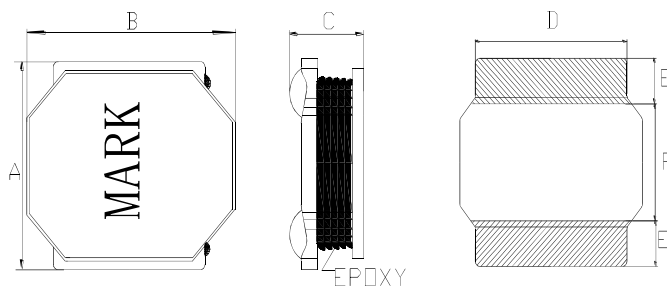

Note : Using Ink for marking

Recommend Land Pattern

Unit: mm


Type	A	B	C	D	E	F
ENR3010F	3.0 ±0.2	3.0 ±0.2	1.2 Max.	2.5 Ref.	0.9 Ref.	1.2 Ref.
ENR3012F	3.0 ±0.2	3.0 ±0.2	1.3 Max.	2.85 Ref.	0.9 Ref.	1.2 Ref.
ENR3015F	3.0 ±0.2	3.0 ±0.2	1.5 Max.	2.78 Ref.	0.9 Ref.	1.2 Ref.

■ Marking

- The inductor is marked with a 3-digit code

Nominal Inductance	
Example	Nominal Value
1R0	1.0 μH
100	10 μH
101	100 μH

● **Reliability test and requirement**

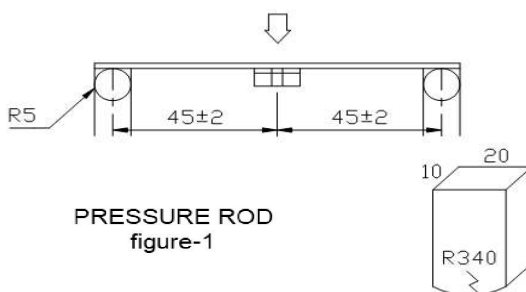Mechanical		
Item	Specification and Requirement	Test Method
Substrate bending	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage or electrical damage.	<p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3 mm. (keep time 30 seconds).</p> <p style="text-align: center;">F(Pressurization)</p>  <p style="text-align: center;">PRESSURE ROD figure-1</p>
Vibration	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage.	<p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated. Should be applied to the 3 directions (X, Y, Z) for 2 hours each. (A total of 6 hours)</p>
Solderability	New solder More than 90%.	<p>Flux (rosin, isopropyl alcohol {JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±2°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p>



Power Inductor ENR30 F Series Product Specifications

Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	6/9

Mechanical

Item	Specification and Requirement	Test Method
Resistance to soldering heat. (reflow soldering)	There shall be no damage or problems.	<p style="text-align: center;">Temperature profile of reflow soldering</p> <p style="text-align: center;">Soldering (Peak temperature 260±3°C 10 sec)</p> <p style="text-align: center;">30 sec Min 230 (230⁺⁰ °C)</p> <p style="text-align: center;">Pre-heating 150 ~ 180°C 2 min</p> <p style="text-align: center;">10sec.</p> <p style="text-align: center;">2 min. or more</p> <p style="text-align: center;">Slow cooling (Stored at room temperature)</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p>

ELECTRICAL

Item	Specification and Requirement	Test Method
Insulation resistance	There shall be no other damage or problems.	DC 100V voltage shall be applied across this sample of top surface and the terminal. The insulation resistance shall be more than $1 \times 10^8 \Omega$.
Dielectric withstand voltage	There shall be no other damage or problems.	AC 100V voltage shall be applied for 1minute across set the top surface and the terminal of this sample.
Temperature characteristics	$\Delta L / L 20^\circ C \leq \pm 10\%$ $0 \sim 2000 \text{ ppm}/^\circ C$	The test shall be performed after the sample has stabilized in an ambient temperature of - 40 to + 125°C, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L / L 20^\circ C \leq \pm 10\%$.



**Power Inductor ENR30 F Series
Product Specifications**

Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	7/9

ENVIROMENT CHARACTERISTICS


Item	Specification and Requirement	Test Method															
High temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $125 \pm 2^\circ\text{C}$ and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Low temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $-40 \pm 3^\circ\text{C}$. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Change of temperature.	$\Delta L/Lo \leq \pm 5\%$ There shall be no other damage of problems.	The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. Table 2 <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)</td> <td>10 min.</td> </tr> <tr> <td>2</td> <td>Standard atmospheric</td> <td>5 sec. or less No.1→No.2</td> </tr> <tr> <td>3</td> <td>$125 \pm 2^\circ\text{C}$ (Thermostat No.2)</td> <td>30 min.</td> </tr> <tr> <td>4</td> <td>Standard atmospheric</td> <td>5 sec. or less No.2→No.1</td> </tr> </tbody> </table>		Temperature	Duration	1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.	2	Standard atmospheric	5 sec. or less No.1→No.2	3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.	4	Standard atmospheric	5 sec. or less No.2→No.1
	Temperature	Duration															
1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.															
2	Standard atmospheric	5 sec. or less No.1→No.2															
3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.															
4	Standard atmospheric	5 sec. or less No.2→No.1															
Moisture storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in a temperature of $40 \pm 2^\circ\text{C}$ and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.															

Test conditions :

The sample shall be reflow soldered onto the printed circuit board in every test.


■ Packaging

(1) CARRIER TAPE DIMENSIONS (Unit : mm)

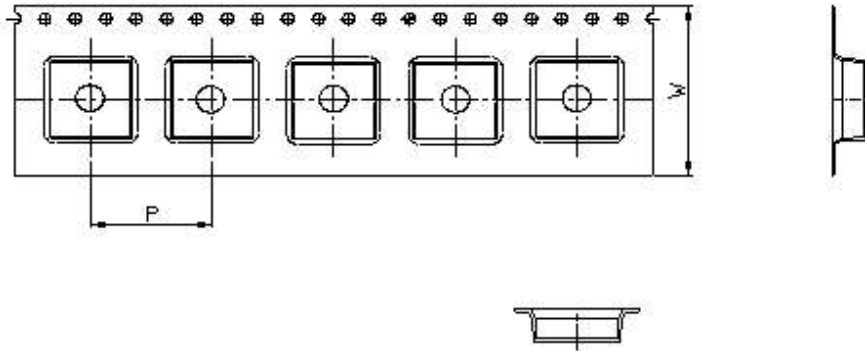

W	8
P	4

(2) TAPING DIMENSIONS (Unit : mm)

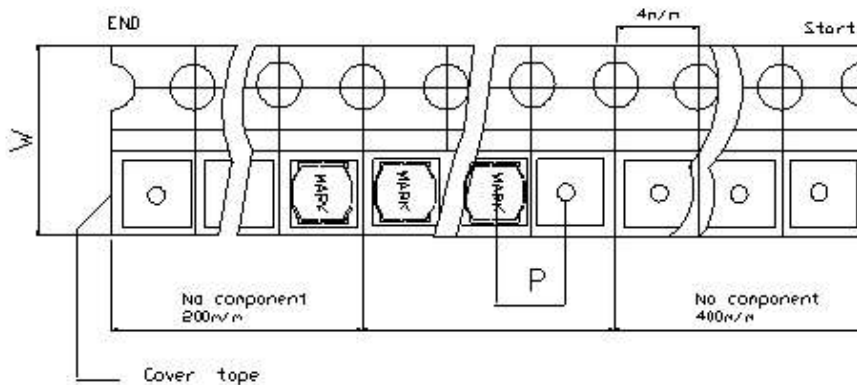

Note: After the product is ready, the outermost layer and the innermost layer of the reel.



Type	Outermost Layer	Innermost Layer
ENR3010V	400	200
ENR3012V	400	200
ENR3015V	400	200



Power Inductor ENR30 F Series Product Specifications

Document No.	S-10-12-120-01
Revision Date	2022 / 08 / 04
Page No.	9/9

(3) REEL DIMENSIONS (Unit : mm)

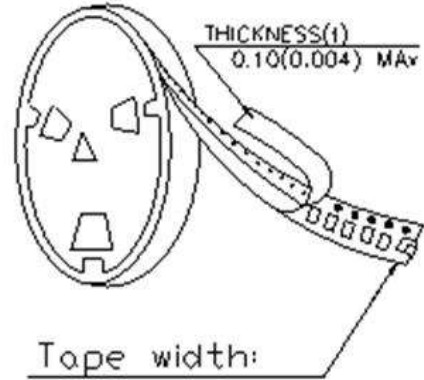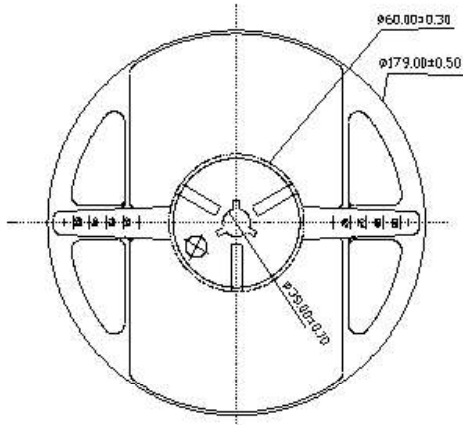

Tape width:

Tape Width : 8mm

(4) Quantity (PCS)

Type	pcs / Reel
ENR3010F	2000
ENR3012F	2000
ENR3015F	2000