



Power Inductor ECDH6D38F Series Product Specifications

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	1/9

Power Inductor — ECDH6D38F series



Parts Number Explanation

Example:

ECD	H6D38	F	R47	M	T	W	Z
Product Type	Size (mm)	Application	Inductance (uH)	Tolerance	Package	Internal Code	Optional
Wire-wound Power Inductor	H6D38		R47 : 0.47uH R68 : 0.68uH	N : ±30% M : ±20% K : ±10%	T : Taping		Z : Default Code



Power Inductor ECDH6D38F Series Product Specifications

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	2/9

■ Standard Electrical Specifications

Part No.	Inductance	DCR (mΩ)	DCR (mΩ)	Isat (A)
	L (μH)	MAX	TYP	$\Delta L/L_0 \leq 35\%$
ECDH6D38F-1R5N-TWZ	1.5	15	11	4.50
ECDH6D38F-2R2M-TWZ	2.2	17	12	4.00
ECDH6D38F-3R3M-TWZ	3.3	20	16	3.50
ECDH6D38F-4R7M-TWZ	4.7	24	21.5	2.90
ECDH6D38F-6R8M-TWZ	6.8	29	24.5	2.40
ECDH6D38F-8R2M-TWZ	8.2	34	30.5	2.20
ECDH6D38F-100M-TWZ	10	38	32	2.00
ECDH6D38F-120M-TWZ	12	53	42	1.70
ECDH6D38F-150M-TWZ	15	57	51.5	1.60
ECDH6D38F-180M-TWZ	18	92	69	1.50
ECDH6D38F-220M-TWZ	22	96	72	1.30
ECDH6D38F-270M-TWZ	27	120	89	1.20
ECDH6D38F-330M-TWZ	33	124	99	1.10
ECDH6D38F-390M-TWZ	39	138	115	1.00
ECDH6D38F-470M-TWZ	47	155	128	0.95
ECDH6D38F-560M-TWZ	56	220	165	0.85
ECDH6D38F-680M-TWZ	68	234	200	0.75
ECDH6D38F-820M-TWZ	82	324	260	0.70
ECDH6D38F-101M-TWZ	100	358	290	0.65
ECDH6D38F-121M-TWZ	120	470	385	0.59
ECDH6D38F-151M-TWZ	150	580	530	0.54
ECDH6D38F-181M-TWZ	180	690	570	0.49
ECDH6D38F-221M-TWZ	220	890	740	0.43
ECDH6D38F-271M-TWZ	270	1290	920	0.40
ECDH6D38F-331M-TWZ	330	1550	1165	0.35
ECDH6D38F-471M-TWZ	470	2200	1650	0.32
ECDH6D38F-561M-TWZ	560	2850	1850	0.29
ECDH6D38F-681M-TWZ	680	3200	2600	0.25
ECDH6D38F-102M-TWZ	1000	5700	4900	0.20
ECDH6D38F-202M-TWZ	2000	11000	8650	0.10



**Power Inductor ECDH6D38F Series
Product Specifications**


Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	3/9

Notes :

1. Test Frequency : 100KHZ/0.25V
2. Tolerance : N: $\pm 30\%$; M: $\pm 20\%$; K: $\pm 10\%$

■ Dimensions

Right angle Base

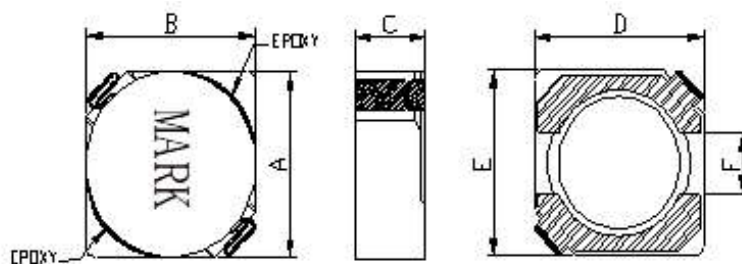


Note : Using Ink for marking

Unit: mm

Type	A	B	C	D	E	F
ECDH6D38F	6.7 ± 0.3	6.7 ± 0.3	4.0 max.	6.7 typ.	6.7 typ.	2.0 typ.

Curve angle base

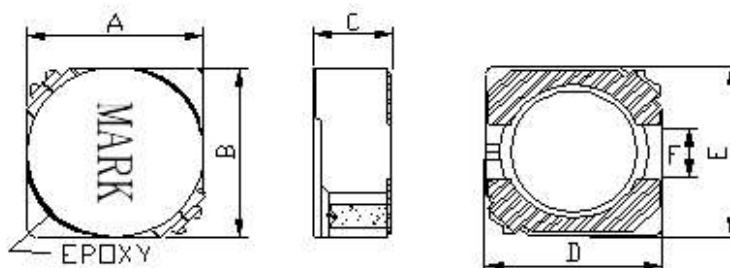

Note : Using Ink for marking

Unit: mm

Type	A	B	C	D	E	F
ECDH6D38F	6.7 ± 0.3	6.7 ± 0.3	4.0 max.	6.7 typ.	6.7 typ.	2.0 typ.



Power Inductor ECDH6D38F Series Product Specifications

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	4/9

■ Marking

- The inductor is marked with a 3-digit code

Nominal Inductance	
Example	Nominal Value
1R0	1.0 μ H
100	10 μ H
101	100 μ H



**Power Inductor ECDH6D38F Series
Product Specifications**

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	5/9

● **Reliability test and requirement**

Mechanical		
Item	Specification and Requirement	Test Method
Substrate bending	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage or electrical damage.	<p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3 mm. (keep time 30 seconds).</p> <p style="text-align: center;">F(Pressurization)</p> <p style="text-align: center;">PRESSURE ROD figure-1</p>
Vibration	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage.	<p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated. Should be applied to the 3 directions (X, Y, Z) for 2 hours each. (A total of 6 hours)</p>
Solderability	New solder More than 90%.	<p>Flux (rosin, isopropyl alcohol {JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±2°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p>



**Power Inductor ECDH6D38F Series
Product Specifications**

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	6/9

Mechanical

Item	Specification and Requirement	Test Method
Resistance to soldering heat. (reflow soldering)	There shall be no damage or problems.	<p>Temperature profile of reflow soldering</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p>

ELECTRICAL

Item	Specification and Requirement	Test Method
Insulation resistance	There shall be no other damage or problems.	DC 100V voltage shall be applied across this sample of top surface and the terminal. The insulation resistance shall be more than $1 \times 10^8 \Omega$.
Dielectric withstand voltage	There shall be no other damage or problems.	AC 100V voltage shall be applied for 1minute across set the top surface and the terminal of this sample.
Temperature characteristics	$\Delta L / L 20^\circ\text{C} \leq \pm 10\%$ $0 \sim 2000 \text{ ppm}/^\circ\text{C}$	The test shall be performed after the sample has stabilized in an ambient temperature of - 40 to + 125°C, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L / L 20^\circ\text{C} \leq \pm 10\%$.



**Power Inductor ECDH6D38F Series
Product Specifications**

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	7/9

ENVIROMENT CHARACTERISTICS


Item	Specification and Requirement	Test Method															
High temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $125 \pm 2^\circ\text{C}$ and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Low temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $-40 \pm 3^\circ\text{C}$. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Change of temperature.	$\Delta L/Lo \leq \pm 5\%$ There shall be no other damage of problems.	The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. Table 2 <table border="1"> <thead> <tr> <th>Step.</th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)</td> <td>10 min.</td> </tr> <tr> <td>2</td> <td>Standard atmospheric No.1→No.2</td> <td>5 sec. or less</td> </tr> <tr> <td>3</td> <td>$125 \pm 2^\circ\text{C}$ (Thermostat No.2)</td> <td>30 min.</td> </tr> <tr> <td>4</td> <td>Standard atmospheric No.2→No.1</td> <td>5 sec. or less</td> </tr> </tbody> </table>	Step.	Temperature	Duration	1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.	2	Standard atmospheric No.1→No.2	5 sec. or less	3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.	4	Standard atmospheric No.2→No.1	5 sec. or less
Step.	Temperature	Duration															
1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.															
2	Standard atmospheric No.1→No.2	5 sec. or less															
3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.															
4	Standard atmospheric No.2→No.1	5 sec. or less															
Moisture storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in a temperature of $40 \pm 2^\circ\text{C}$ and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.															

Test conditions :

The sample shall be reflow soldered onto the printed circuit board in every test.


■ Packaging Information

(1) CARRIER TAPE DIMENSIONS (Unit : mm)

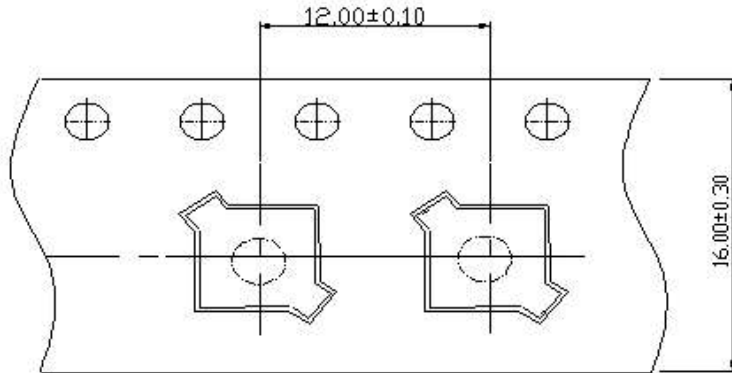

W	16
P	12

(2) TAPING DIMENSIONS (Unit : mm)

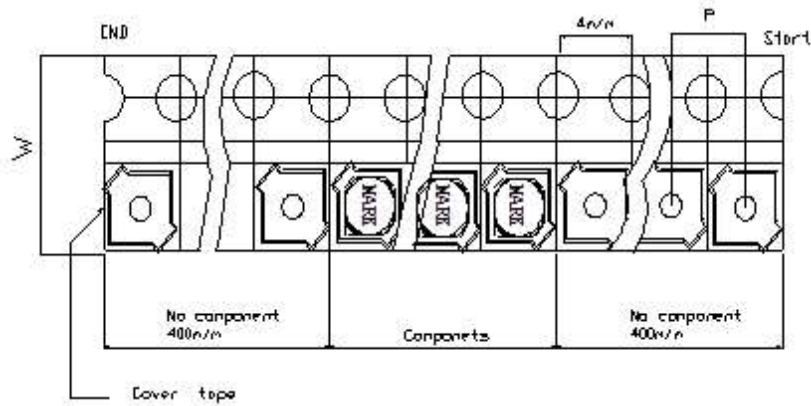

Note:


After the product is ready, the outermost layer of the reel is 400mmMIN and the innermost layer is 400mmMIN.



Power Inductor ECDH6D38F Series Product Specifications

Document No.	S-10-12-119-01
Revision Date	2022 / 08 / 04
Page No.	9/9

(3) REEL DIMENSIONS (Unit : mm)

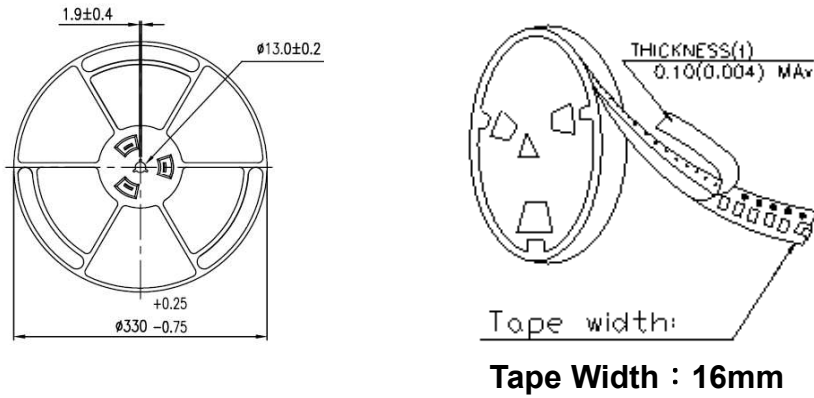

(4) Quantity (PCS)

Type	pcs / Reel
ECDH6D38F	1000