



Power Inductor ENR40 F Series Product Specifications

Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	1/9

Power Inductor — ENR40 F Series



Parts Number Explanation

Example:

ENR	4018	F	R47	M	T	W	Z
Product Type	Size (mm)	Application	Inductance (uH)	Tolerance	Package	Internal Code	Optional
Wire-wound Power Inductor	4018 4030		R47 : 0.47uH R68 : 0.68uH	N : ±30% M : ±20% K : ±10%	T : Taping		Z : Default Code



Power Inductor ENR40 F Series Product Specifications

Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	2/9

■ Standard Electrical Specifications

Part No.	Inductance	DCR (mΩ)	DCR (mΩ)	Isat (A)	Irms (A)
	L (μH)	MAX	TYP	$\Delta L/L_0 \leq 30\%$	$\Delta T \leq 40^\circ\text{C}$
ENR4018F-R56N-TWZ	0.56	24	16	5.00	4.80
ENR4018F-1R0M-TWZ	1.0	32	25	4.50	3.50
ENR4018F-1R2M-TWZ	1.2	45	35	4.00	3.00
ENR4018F-2R2M-TWZ	2.2	58	47	3.00	2.60
ENR4018F-3R3M-TWZ	3.3	84	70	2.15	2.00
ENR4018F-4R7M-TWZ	4.7	115	88	2.00	1.80
ENR4018F-5R6M-TWZ	5.6	125	100	1.70	1.65
ENR4018F-6R8M-TWZ	6.8	135	110	1.60	1.50
ENR4018F-100M-TWZ	10	220	170	1.40	1.30
ENR4018F-150M-TWZ	15	325	270	0.95	0.90
ENR4018F-220M-TWZ	22	450	365	0.80	0.75
ENR4018F-330M-TWZ	33	680	550	0.75	0.70
ENR4018F-470M-TWZ	47	845	780	0.65	0.55
ENR4018F-680M-TWZ	68	1300	1000	0.52	0.50
ENR4018F-101M-TWZ	100	1900	1500	0.42	0.40
ENR4018F-151M-TWZ	150	3000	2300	0.36	0.34
ENR4018F-221M-TWZ	220	4800	4200	0.30	0.25

Notes :

1. Test Frequency : 100KHZ/0.25V
2. Tolerance : N: $\pm 30\%$; M: $\pm 20\%$; K: $\pm 10\%$



**Power Inductor ENR40 F Series
Product Specifications**


Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	3/9

Part No.	Inductance	DCR (mΩ)	DCR (mΩ)	Isat (A)	Irms (A)
	L (μH)	MAX	TYP	$\Delta L/L_0 \leq 30\%$	$\Delta T \leq 40^\circ\text{C}$
ENR4030F-1R0N-TWZ	1.0	18	14	5.26	4.15
ENR4030F-1R5M-TWZ	1.5	26	20	4.84	3.34
ENR4030F-2R2M-TWZ	2.2	39	30	4.90	2.95
ENR4030F-3R3M-TWZ	3.3	52	40	3.30	2.40
ENR4030F-3R9M-TWZ	3.9	74	57	3.00	2.10
ENR4030F-4R7M-TWZ	4.7	78	60	2.90	2.00
ENR4030F-6R8M-TWZ	6.8	117	90	2.75	1.60
ENR4030F-100M-TWZ	10	130	100	1.95	1.50
ENR4030F-150M-TWZ	15	247	190	1.65	1.11
ENR4030F-220M-TWZ	22	293	225	1.30	1.00
ENR4030F-330M-TWZ	33	429	330	1.10	0.84
ENR4030F-470M-TWZ	47	579	445	0.95	0.72
ENR4030F-510M-TWZ	51	611	470	0.90	0.70
ENR4030F-680M-TWZ	68	1128	868	0.72	0.52
ENR4030F-121M-TWZ	120	1755	1350	0.55	0.42
ENR4030F-471M-TWZ	470	9360	7200	0.30	0.20

Notes :

1. Test Frequency : 100KHZ/0.25V
2. Tolerance : N: $\pm 30\%$; M: $\pm 20\%$; K: $\pm 10\%$

■ Dimensions

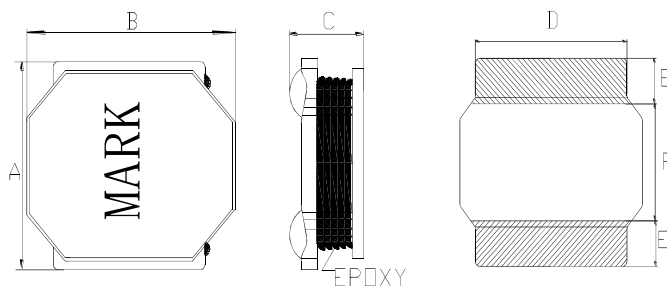

Note : Using Ink for marking

Recommend Land Pattern

Unit: mm

Type	A	B	C	D	E	F
ENR4018F	4.0 ±0.2	4.0 ±0.2	1.8 Max.	3.4 Ref.	1.4 Ref.	1.8 Ref.
ENR4030F	4.0 ±0.2	4.0 ±0.2	3.0 Max.	3.2 Ref.	0.95 Ref.	2.1 Ref.

■ Marking

- The inductor is marked with a 3-digit code

Nominal Inductance	
Example	Nominal Value
1R0	1.0 μH
100	10 μH
101	100 μH



**Power Inductor ENR40 F Series
Product Specifications**

Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	5/9

● **Reliability test and requirement**

Mechanical		
Item	Specification and Requirement	Test Method
Substrate bending	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage or electrical damage.	<p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3 mm. (keep time 30 seconds).</p> <p style="text-align: center;">F(Pressurization)</p> <p style="text-align: center;">PRESSURE ROD figure-1</p>
Vibration	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage.	<p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated. Should be applied to the 3 directions (X, Y, Z) for 2 hours each. (A total of 6 hours)</p>
Solderability	New solder More than 90%.	<p>Flux (rosin, isopropyl alcohol {JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±2°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p>



Power Inductor ENR40 F Series Product Specifications

Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	6/9

Mechanical

Item	Specification and Requirement	Test Method
Resistance to soldering heat. (reflow soldering)	There shall be no damage or problems.	<p style="text-align: center;">Temperature profile of reflow soldering</p> <p style="text-align: center;">Soldering (Peak temperature 260±3°C 10 sec)</p> <p style="text-align: center;">30 sec Min 230 (230±0°C)</p> <p style="text-align: center;">Pre-heating 150 ~ 180°C 2 min</p> <p style="text-align: center;">10sec</p> <p style="text-align: center;">Slow cooling (Stored at room temperature) 2 min. or more</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p>

ELECTRICAL

Item	Specification and Requirement	Test Method
Insulation resistance	There shall be no other damage or problems.	DC 100V voltage shall be applied across this sample of top surface and the terminal. The insulation resistance shall be more than $1 \times 10^8 \Omega$.
Dielectric withstand voltage	There shall be no other damage or problems.	AC 100V voltage shall be applied for 1minute across set the top surface and the terminal of this sample.
Temperature characteristics	$\Delta L / L 20^\circ C \leq \pm 10\%$ $0 \sim 2000 \text{ ppm}/^\circ C$	The test shall be performed after the sample has stabilized in an ambient temperature of - 40 to + 125°C, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L / L 20^\circ C \leq \pm 10\%$.



Power Inductor ENR40 F Series Product Specifications

Document No.	S-10-12-121-01
Revision Date	2022 / 08 / 04
Page No.	7/9

ENVIROMENT CHARACTERISTICS


Item	Specification and Requirement	Test Method															
High temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $125 \pm 2^\circ\text{C}$ and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Low temperature storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in an atmosphere with a temperature of $-40 \pm 3^\circ\text{C}$. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Change of temperature.	$\Delta L/Lo \leq \pm 5\%$ There shall be no other damage of problems.	The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. <div style="text-align: center;">Table 2</div> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr> <th style="width: 5%;"></th> <th style="width: 40%;">Temperature</th> <th style="width: 55%;">Duration</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)</td> <td style="text-align: center;">10 min.</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">5 sec. or less No.1→No.2</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">$125 \pm 2^\circ\text{C}$ (Thermostat No.2)</td> <td style="text-align: center;">30 min.</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">5 sec. or less No.2→No.1</td> </tr> </tbody> </table>		Temperature	Duration	1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.	2	Standard atmospheric	5 sec. or less No.1→No.2	3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.	4	Standard atmospheric	5 sec. or less No.2→No.1
	Temperature	Duration															
1	$-40 \pm 3^\circ\text{C}$ (Thermostat No.1)	10 min.															
2	Standard atmospheric	5 sec. or less No.1→No.2															
3	$125 \pm 2^\circ\text{C}$ (Thermostat No.2)	30 min.															
4	Standard atmospheric	5 sec. or less No.2→No.1															
Moisture storage.	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 500 hours in a temperature of $40 \pm 2^\circ\text{C}$ and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.															

Test conditions :

The sample shall be reflow soldered onto the printed circuit board in every test.


■ Packaging

(1) CARRIER TAPE DIMENSIONS (Unit : mm)

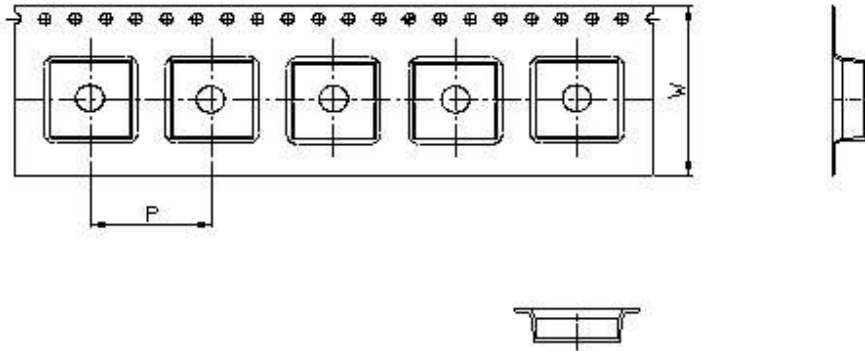

W	12
P	8



(2) TAPING DIMENSIONS (Unit : mm)

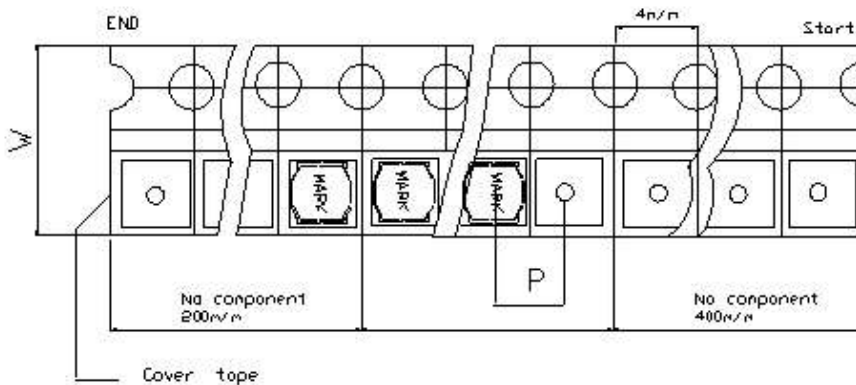

Note : After the product is ready, the outermost layer and the innermost layer of the reel.

Type	Outermost Layer	Innermost Layer
ENR4018F	400	200
ENR4030F	400	400

(3) REEL DIMENSIONS (Unit : mm)

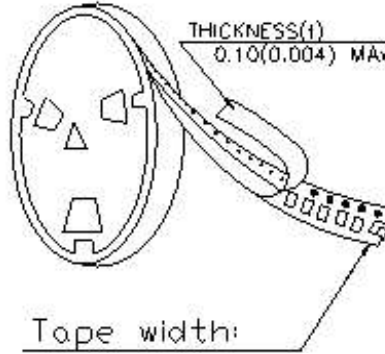

Tape Width : 12mm

(4) Quantity (PCS)

Type	pcs / Reel
ENR4018F	3000
ENR4030F	2000